



VIVID ENERGIES


LED Lighting Solutions For Our Future And Your Bottom Line



Type:
Project:
Description:

LED

Round Surface Mount Downlight



110
Lumens Per Watt

5
Year Warranty

Damp
Location
Listed

FEATURES

LOW PROFILE DESIGN


- Low profile design under 1" below the ceiling
- Multiple finish options with magnetic snap on trims
- Uniform light distribution with no shadowing
- 120 degree beam angle
- Dimming: 120V = Triac / UNIV (120-277V) = 0-10V

SPECIFICATIONS

Model Number	Size / Watts / Lumens	Mounting	Voltage	CRI	UL Listing	Power Factor
VIV-SMCIR	5" dia. (12W / 840 LM) 7" dia. (15W / 1000 LM) 9" dia. (18W / 1260 LM) 12" dia. (24W / 1920 LM)	J-Box Standard, Downlight with mounting accessories	120V (Standard) 120-277V (Available)	>80	Damp Location ¹	0.90

ORDERING GUIDE

Sample Number: VIV-SMCIR-9D/18W-120V-35-WH-5/6TNC

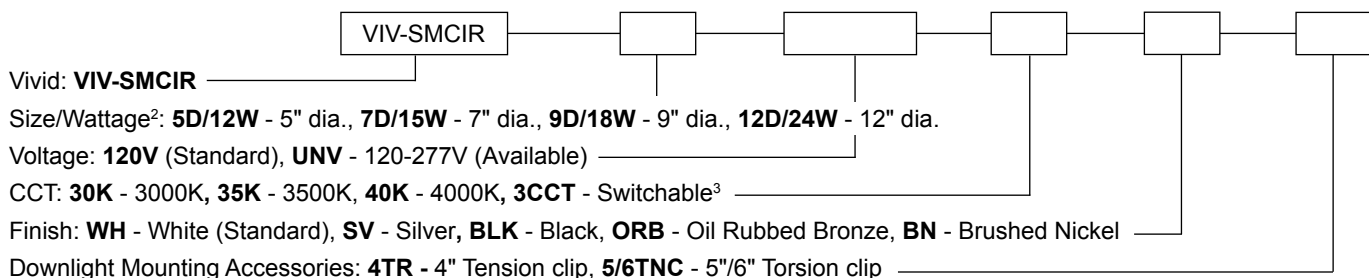

¹ Surface mounted wet location available. Contact factory for information.

² Refer to lumens in specifications table

³ Not available in 7" (15W) 120-277V version



VIVID ENERGIES

LED Lighting Solutions For Our Future And Your Bottom Line




Type:
Project:
Description:

LED


ACCESSORIES



Satin Nickel



Polished Chrome



Matt Black



Bronze

Optional Trims



4" Tension Clip



5"/6" Torsion Clip

INSTALLATION



Surface Mounted



Downlight