VIVID ENERGIES				
LED Lighting Solutions For Our Future And Your Bottom Line				











Type:	
Project:	
Description:	

8" & 12" Circular J-Box Mount IP44 Downlights







- Even, uniform lens illumination
- Minimal fixture profile under 1"
- 120 degree beam angle
- Universal voltage: 120-277V
- TRIAC dimmable using 120V only
- IP44 "Splash Proof" listing





Year Warranty


Lumens Per Watt

SPECIFICATIONS

Model Number	Size / Watts / Lumens	Voltage	CRI	UL Listing	Power Factor	ССТ
VIV-SMCIRW	8" dia. / 10W / 1000 LM 12" dia. / 15W / 1500 LM	UNV 120-277V	80	IP44	>0.90	3CCT - Switchable 3000K/3500K/4000K

ORDERING GUIDE

Sample Number: VIV-SMCIRW-8IN-10W-UNV-3CCT

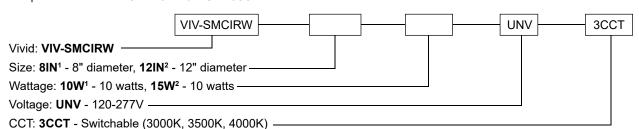

This product is subject to minimum order quantities. Contact factory for details.

^{1 8&}quot; diameter = 10W / 1000 lumens

² 12" diameter = 15W / 1500 lumens

VIVID ENERGIES				
LED Lighting Solutions For Our				

Future And Your Bottom Line















Туре:			
Project:			
Description:			


INSTALLATION











DIMENSIONS

All dimensions are nominal for below listed 8" and 12" versions

