











Type:	
Project:	
Description:	

Surface Circular Multi-Mount Downlight











FEATURES

F DESIGN


- Low profile design under 1" below the ceiling
- Multiple finish options with magnetic snap on trims
- Uniform light distribution with no shadowing
- 120 degree light distribution
- Dimming: 120V = Triac / 277V = 0-10V

SPECIFICATIONS

Model Number	Size / Watts / Lumens	Mounting	Voltage	CRI	UL Listing	Power Factor
VIV-SMCIR	5" dia. (12W / 840 LM) 7" dia. (15W / 1000 LM) 9" dia. (18W / 1260 LM) 12" dia. (24W / 1920 LM)	J-Box Standard, Downlight with mounting	120V (Standard) UNV (Available)	>80	Damp Location ¹	0.90
	Nominal Sizes	accessories				

ORDERING GUIDE

Sample Number: VIV-SMCIR-9IN-18W-120V-35-WH-5/6TNC

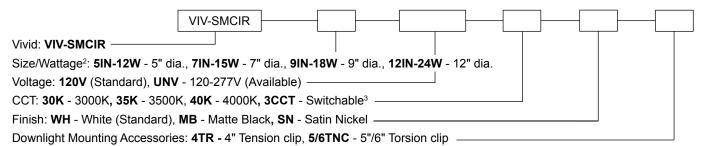

This product is subject to minimum order quantities. Contact factory for details.

¹ See '8 & 12" Circular J-Box Mount Series' for IP44 listing

² Refer to lumens in specifications table

³ Not available in 7" (15W) 120-277V version

VIVID ENERGIES		
LED Lighting Solutions For Our		

Future And Your Bottom Line

energy ?	
ENERGY STAR	









Type:	
Project:	
Description:	

ACCESSORIES



INSTALLATION

