



VIVID ENERGIES

LED Lighting Solutions For Our Future And Your Bottom Line



Type:
Project:
Description:




High Abuse NEMA 4X Exit Sign



FEATURES

- Reinforced polycarbonate construction
- Stainless steel exposed hardware, tamper proof screws
- One piece molded and gasketed lens
- Temperature rating of 32°F to 122° F (+0°C to +50°C)
- Option for self-powered sealed Ni-Cad backup
- Auto self-test feature standard

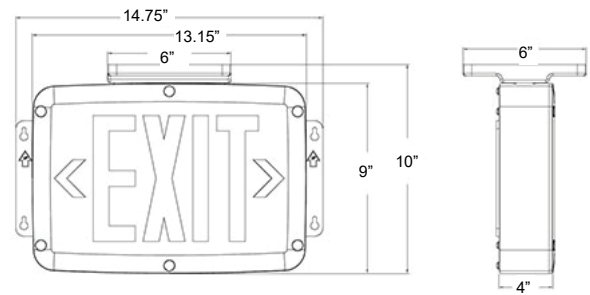

SPECIFICATIONS

Model Number	Input Voltage	Wattage	Housing/Face Options	Letter Colors	Ratings	Standard Mounting
VIV-EX4X	120-277V	2W / AC 3.34W / Self-Powered	Black White Gray	Red Green	NEMA 4X NSF 2 IP66	Universal - Ceiling or End Mount, Backplate for single-face only

ORDERING GUIDE

Sample Number: VIV-EX4X-UNV-SF-BK-R-SP

