



VIVID ENERGIES


LED Lighting Solutions For Our Future And Your Bottom Line



Type:
Project:
Description:

LED

## Flat Panel - 2'x2' and 2'x4'

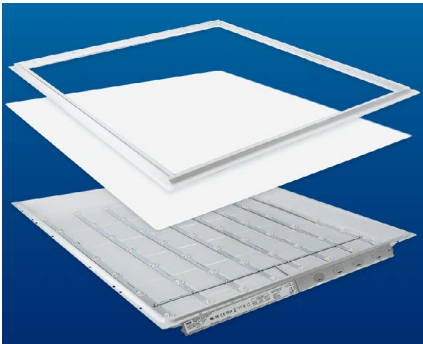

Up To  
**149**  
Lumens Per Watt

### FEATURES


- Sleek design with visual comfort and great performance
- Industry Leading Rated Lifetime Output 90% at 54,000 Hours (2600 Annual Operating Hours = 20+ Year Predicted Lifespan)
- Housing: UV Resistant, Aluminum Frame, Zinc Coated Iron

### 2'x2' SPECIFICATIONS

Model Number	Dimensions	CRI	Wattage	Efficacy (LPW)	Power Factor	Dimming
VIV-FP	2'x2'	80.5	Switchable 30W, 35W, 40W	30W - 149 LPW 35W - 149 LPW 40W - 147 LPW	0.89	0-10V

### 2'x2' ORDERING GUIDE

Sample Number: VIV-FP-2x2-30W-UNV-50K-EM

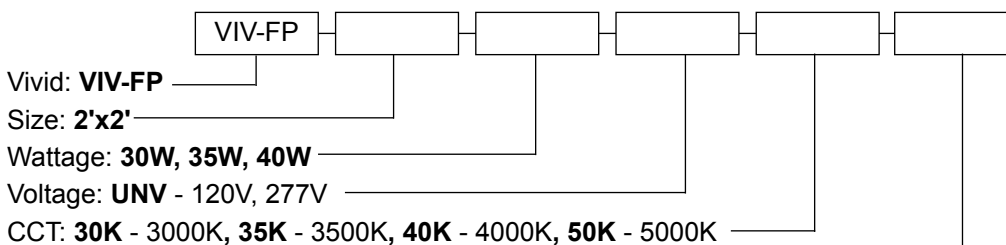

Options: **EM** - 90 Minute External Battery, **IMDS** - Internal Microwave/Daylight Sensor  
**EPDS** - External PIR/Daylight sensor, **MSRC** - Microwave Sensor Remote Control  
**PIRRC** - PIR Sensor Remote Control



VIVID ENERGIES

LED Lighting Solutions For Our Future And Your Bottom Line



Type:
Project:
Description:


**LED**

**2'x4' SPECIFICATIONS**


Model Number	Dimensions	CRI	Wattage	Efficacy (LPW)	Power Factor	Dimming
VIV-FP	2'x4'	>80	Switchable 25W, 30W, 35W, 40W, 50W, 60W	40W - 149 LPW 50W - 149 LPW 60W - 148 LPW	0.92	0-10V

**2'x4' ORDERING GUIDE**


Sample Number: VIV-FP-2x4-40W-UNV-50K-EM

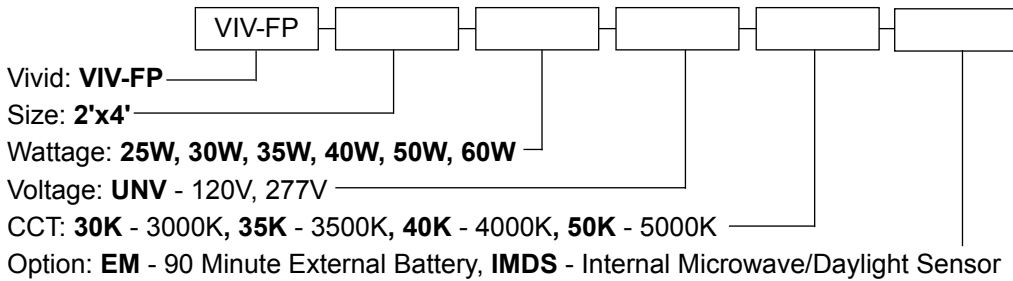

**2' X 2' DIMENSIONS**

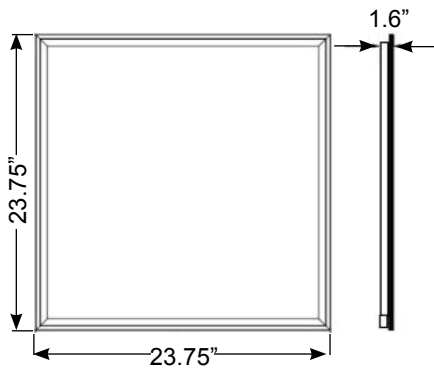

**2' X 4' DIMENSIONS**

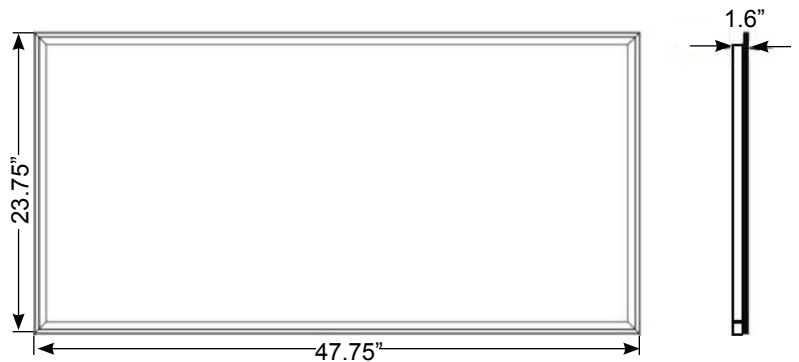

**PIR SENSOR COVERAGE**

